

INYATHI

LADDERS

PRODUCT CATALOGUE

2026

Inyathi ladders

FOR RETAIL & TRADE

ALUMINIUM / FIBREGLASS / MOBILE ACCESS

[EXPLORE THE RANGE >](#)



Manufactured to

SABS SANS 50131

SALES & TRADE ENQUIRIES

011 794 4456 | 010 222 0042

WhatsApp 067 774 3799

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za

CORE RETAIL RANGE

Your core retail range.

Six featured models for your store / all rated 150 kg



150 kg

5-step aluminium

ILMD005

1.5 m nominal height

[VIEW RANGE / 05 >](#)



150 kg

6-step aluminium

ILMD006

1.8 m nominal height

[VIEW RANGE / 05 >](#)



150 kg

8-step aluminium

ILMD008

2.4 m nominal height

[VIEW RANGE / 05 >](#)



150 kg

10-step aluminium

ILMD010

3.0 m nominal height

[VIEW RANGE / 05 >](#)



150 kg

6 m extension

ILEX600

6.0 m extended length

[VIEW RANGE / 10 >](#)



150 kg

Multipurpose

ILAM3.3

3.3 m extended length

[VIEW RANGE / 14 >](#)

A-frame figures are nominal heights. Extension and multipurpose figures are extended lengths.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



CONTENTS

Contents & range guide.

Find your product range, specifications and ordering information.

Customer requirement	Start with this range	Pages
Everyday access	Medium-duty A-frame / compact	5-6
Industrial A-frame work	175 kg single / double-sided	7-8
Supported straight access	150 kg lean-to / push-up / options	9-11
Several ladder formats	150 kg 3-in-1 / 5-in-1 / hinged	12-14
Rope-assisted extension	175 kg aluminium extension	15
Fibreglass A-frames	150 kg partial / 175 kg full fibre	16-18
Eskom-spec extension	Red fibreglass / 136 kg safe, 175 kg max.	19
Telkom-type extension	150 kg aluminium / fibreglass	20-21
Mobile platform access	180 kg aluminium ladder stage	22
Utility fitting choices	Pole supports, feet, ropes and locks	23
Replacement parts	Caps, feet, hinges and supports	24-25

ALSO IN THIS CATALOGUE

Core retail range	02	Local manufacturing	04
Dimension guide	26	Reseller ordering	27
Ladder display stand	28	Contact Inyathi	29

Select the access format, working height and load together. Confirm model-specific suitability and the required fittings before ordering.

Request a quote

Send model, quantity and delivery town.

067 774 3799 WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



LOCAL MANUFACTURING

Made in Honeydew.

A local manufacturing connection for your ladder range.



INYATHI LADDERS / FACTORY PHOTOGRAPH

01

Local roots

Established in 2018. Manufacturing in Honeydew, Johannesburg.

02

Product confidence

Manufactured to SABS SANS 50131. Request documents for your selected range.

03

Ongoing support

Speak to our team about product selection, replacement parts and nationwide delivery.

Request a quote

Send model, quantity and delivery town.

067 774 3799 WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / A-FRAME

Medium-duty A-frame ladders

Single-sided aluminium / medium duty



ILMD / yellow-cap range

ACCESSORIES & OPTIONS

Replacement caps, feet and A-frame hinges. Paint-tray fitment: enquire. Match parts to the model; see pages 24-25.

150 kg

MAX. WORKING LOAD

Construction. Lightweight, corrosion-resistant 6005A-T6 aluminium frame with shaped stiles and 80 mm profiled steps. Six-rivet step-to-rail connections secure each step.

Hinges & footing. Double-riveted, anti-pinch hinges and slip-resistant feet support stable setup on a suitable level surface.

Top cap. Moulded cap with slots for tools and provision for a paint can. The yellow-cap ILMD range is highlighted here; black-cap references are also listed.

Application. Single-sided access for shops, facilities, general maintenance and light trade work. The marketed step size includes the top cap, which is not a standing step.

6 SIZES

3-10 STEP / 0.9-3.0 m NOMINAL

ENQUIRE BY CODE

ILMD code	ILMN reference	Size	Height (m)
ILMD003	ILMN003	3-step	0.9
ILMD004	ILMN004	4-step	1.2
ILMD005	ILMN005	5-step	1.5
ILMD006	ILMN006	6-step	1.8
ILMD008	ILMN008	8-step	2.4
ILMD010	ILMN010	10-step	3.0

Step size includes the top cap. The cap is not a standing step.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / COMPACT

Compact double-sided A-frame ladder

ILDM002 / aluminium / 2-step



ILDM002

ACCESSORIES & OPTIONS

Replacement PVC feet, step components and hinges: confirm ILDM002 fitment. Parts are shown on pages 24-25.

2-step

COMPACT RANGE

Format. Compact, double-sided aluminium A-frame with a 2-step size designation and 0.6 m nominal height. Steps are accessible from either side.

Steps & frame. 80 mm profiled steps at 300 mm spacing, secured with six-rivet connections. The aluminium frame is light to handle and resists corrosion.

Footings. Non-scaff PVC feet provide slip resistance on a suitable surface. Open and secure the ladder fully before use.

Selection. A small access option for stores, workshops and routine tasks. Confirm the current model load rating and permitted standing position when ordering.

1 SIZE

2 STEP / 0.6 m NOMINAL

ENQUIRE BY CODE

Product code	Size	Height (m)
<u>ILDM002</u>	2-step	0.6

COMPACT & EASY TO STORE

A convenient option for customers who need a small ladder close at hand. Ask our team for the right model for your task.

Confirm the current load rating when ordering. Follow the rating and instructions on the supplied ladder.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / HEAVY DUTY

Heavy-duty single-sided A-frame ladders

Aluminium / green cap and feet



ILSH006 / green cap

ACCESSORIES & OPTIONS

Replacement green cap, feet and hinges; paint-tray option. Confirm model fitment. Parts: pages 24-25.

175 kg

MAX. WORKING LOAD

Construction. Heavy-duty 6005A-T6 aluminium stiles with additional bracing at the top, bottom and steps. Six-rivet step connections reinforce the frame.

Steps & hinges. 80 mm profiled steps with a 300 mm rise. Double-riveted, anti-pinch hinges support the single-sided A-frame arrangement.

Cap & feet. Green moulded top tray with tool slots and paint-can provision, plus green non-scuff PVC feet with slip-resistant contact surfaces.

Application. Industrial, workshop and maintenance access. Corrosion-resistant aluminium suits regular trade use. Step designations include the top cap; do not stand on the cap.

9 SIZES

3-16 STEP / 0.9-4.8 m NOMINAL

ENQUIRE BY CODE

Product code	Size	Height (m)
ILSH003	3-step	0.9
ILSH004	4-step	1.2
ILSH005	5-step	1.5
ILSH006	6-step	1.8
ILSH008	8-step	2.4
ILSH010	10-step	3.0
ILSH012	12-step	3.6
ILSH014	14-step	4.2
ILSH016	16-step	4.8

Step size includes the top cap. The cap is not a standing step. Paint tray shown as a range detail; enquire.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / HEAVY DUTY

Heavy-duty double-sided A-frame ladders

Aluminium / steps on both sides



ILD006

ACCESSORIES & OPTIONS

Replacement feet, hinges and step components. Match the rail profile and fixing pattern. Parts: pages 24-25.

175 kg

MAX. WORKING LOAD

Construction. Corrosion-resistant 6005A aluminium A-frame with steps on both sides. Additional bracing supports the top, bottom and step assemblies.

Steps. 80 mm profiled aluminium steps at 300 mm spacing, secured by six-rivet step-to-rail connections.

Hinges & support. Double-riveted, anti-pinch hinges and a reinforced top assembly. Non-scaff PVC feet provide slip resistance on suitable level ground.

Application. Double-sided access for industrial, commercial and workshop tasks. Use the permitted standing positions and loading arrangement shown in the supplied model instructions.

9 SIZES

3-16 STEP / 0.9-4.8 m NOMINAL

ENQUIRE BY CODE

Product code	Size	Height (m)
ILD003	3-step	0.9
ILD004	4-step	1.2
On request	5-step	1.5
ILD006	6-step	1.8
ILD008	8-step	2.4
ILD010	10-step	3.0
ILD012	12-step	3.6
ILD014	14-step	4.2
ILD016	16-step	4.8

Follow the load rating and user instructions supplied with the selected model.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / STRAIGHT

Aluminium lean-to ladders

Single-section straight ladders



10-rung / 2.8 m



UPPER DETAIL



LOWER DETAIL

ACCESSORIES & OPTIONS

Replacement feet: quote the model and rail profile. Other fittings require model confirmation. Parts: pages 24-25.

150 kg

MAX. WORKING LOAD

Format. Single-section straight ladder for use against a suitable support. The one-piece design has no sliding or hinged sections.

Frame & rungs. Lightweight, corrosion-resistant 6005A aluminium construction with rectangular side stiles and 30 x 30 mm profiled square rungs.

Footings. Slip-resistant feet help the ladder maintain contact with the supporting surface. Select suitable ground, positioning and restraint for the task.

Selection. Order by product code, rung count and ladder length. Listed lengths describe the ladder itself, not standing height or reach. Check transport space and the permitted setup before selecting a size.

7 SIZES

2.0-4.8 m LADDER LENGTH

ENQUIRE BY CODE

Rungs	Ladder length (m)	Product code
7	2.0	ILEX107
8	2.3	ILEX108
10	2.8	ILEX110
11	3.0	ILEX111
13	3.6	ILEX113
15	4.2	ILEX115
17	4.8	ILEX117

Order by product code and rung count. Dimensions are ladder lengths, not standing or reach heights.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / EXTENSION

Aluminium push-up extension ladders

Medium duty / two sliding sections



ILEX600 / range photograph



UPPER DETAIL



LOWER DETAIL

ACCESSORIES & OPTIONS

Optional stabilising bars and pole-rung fittings; replacement feet. Accessory codes: page 11. Parts: pages 24-25.

150 kg

MAX. WORKING LOAD

Construction. Two sliding sections in lightweight, corrosion-resistant 6005A aluminium. Rectangular stiles and 30 x 30 mm profiled square rungs provide a practical trade-access format.

Adjustment & retention. Push-up operation with electroplated mild-steel locks, wide retaining brackets, hooks and rung stopper pins. The published rung rise is 250 mm.

Footings. Slip-resistant feet support contact with suitable ground. Engage the locks and maintain the overlap specified for the selected model.

Options. Compatible stabilising bars and pole-rung fittings are available. See page 11 for ordering references and confirm the complete assembly before use.

7 SIZES

4.8-9.0 m EXTENDED

ENQUIRE BY CODE

Product code	Rungs closed/open	Closed (m)	Extended (m)
ILEX480	10 / 18	2.8	4.8
ILEX540	11 / 20	3.0	5.4
ILEX600	12 / 22	3.3	6.0
ILEX660	13 / 24	3.6	6.6
ILEX720	14 / 26	3.9	7.2
ILEX780	15 / 28	4.2	7.8
ILEX900	17 / 32	4.8	9.0

Lengths are closed / fully extended ladder dimensions, not standing or reach heights. Confirm transport dimensions on order.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / EXTENSION OPTIONS

Complete the setup.

Stabilising bars and pole-rung options for compatible extension ladders.



Stabilising bar

ILEX780SB pictured



Pole rung

ILEX780PR pictured

Option	Product code references
Stabilising bar	ILEX480SB , ILEX600SB , ILEX660SB
Stabilising bar	ILEX720SB , ILEX780SB , ILEX900SB
Pole rung	ILEX780PR

Quote the base ladder code and required option. Confirm compatibility and the rating of the complete assembly.

Request a quote

Send model, quantity and delivery town.

067 774 3799 WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / COMBINATION

3-in-1 combination extension ladders

Medium duty / aluminium



ILEX208 / A-frame configuration



ILEX208 / extension configuration

ACCESSORIES & OPTIONS

Stabilising bar, feet and carrying strap form part of the setup. Confirm replacement fitment by model. Parts: pages 24-25.

150 kg

MAX. WORKING LOAD

Configurations. Two-section aluminium combination ladder for A-frame, supported lean-to and extension use. Select only the formats permitted for the model.

Construction. Lightweight, corrosion-resistant 6005A aluminium frame with 30 x 30 mm profiled square rungs.

Locks & footing. Electroplated steel locking components, slip-resistant feet and a stabilising bottom bar. The carrying strap helps with handling between jobs.

Setup & storage. Secure each section and lock before climbing. Maintain the specified two-rung overlap in extension use. The sections close together for transport and storage; the table separates rungs per section from total rungs.

5 SIZES

2.7-5.1 m EXTENDED

ENQUIRE BY CODE

Product code	Rungs / section	Total rungs	Closed (m)	Extended (m)
ILEX206	6	12	1.8	2.7
ILEX207	7	14	2.1	3.3
ILEX208	8	16	2.4	3.9
ILEX209	9	18	2.7	4.5
ILEX210	10	20	3.0	5.1

Total rungs counts all sections. Extended length is the assembled ladder length. Follow the supplied configuration instructions.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / COMBINATION

5-in-1 combination extension ladders

Medium duty / aluminium



ILEX308 / range photograph

ILEX308 / alternative configuration

ACCESSORIES & OPTIONS

Stabilising bar, feet and carrying strap form part of the setup. Confirm replacement fitment by model. Parts: pages 24-25.

150 kg

MAX. WORKING LOAD

Configurations. Three-section ladder offering A-frame, double-sided, single lean-to, push-up extension and extended freestanding arrangements, as permitted by the model instructions.

Construction. Corrosion-resistant 6005A aluminium frame with 30 x 30 mm profiled square rungs and a compact closed format.

Locks & footing. Electroplated steel locking components, slip-resistant feet and a stabilising bottom bar support secure setup. A carrying strap assists handling.

Selection. Choose the size and working configuration together. Lock every section before use and maintain the required overlap. Closed and extended lengths are listed below.

5 SIZES

3.6-7.2 m EXTENDED

ENQUIRE BY CODE

Product code	Rungs / section	Total rungs	Closed (m)	Extended (m)
ILEX306	6	18	1.8	3.6
ILEX307	7	21	2.1	4.5
ILEX308	8	24	2.4	5.4
ILEX309	9	27	2.7	6.3
ILEX310	10	30	3.0	7.2

Total rungs counts all sections. Extended length is the assembled ladder length. Follow the supplied configuration instructions.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / MULTIPURPOSE

Aluminium multipurpose ladder

ILAM3.3 / hinged / 4 sections x 3 rungs



ILAM3.3 / A-frame



ILAM3.3 / extended

ACCESSORIES & OPTIONS

Stabilising bars and PVC feet. Platform components must match the permitted setup. Enquire for model-specific replacements.

150 kg

MAX. WORKING LOAD

Format. Four hinged sections with three rungs each: 12 rungs in total and a 3.3 m extended length. The articulated frame folds for storage and transport.

Construction. Lightweight 6005A aluminium with 30 x 30 mm profiled square rungs. Galvanized steel, pinch-resistant hinges have visible click locks for positive engagement at permitted settings.

Footing. Two stabilising bars with slip-resistant, non-scurf PVC feet support the complete assembly.

Configurations. Use as a supported straight ladder or A-frame where permitted. Platform arrangements require the specified compatible components. Check every hinge is locked and maintain the hinges according to the supplied instructions.

1 SIZE

3.3 m EXTENDED

ENQUIRE BY CODE

Product code	Sections x rungs	Extended length (m)
ILAM3.3	4 x 3	3.3

COMPACT STORAGE

The articulated frame folds into a smaller format for storage and transport between jobs.



Folded format

For compact storage between jobs.

Set and lock each hinge as instructed. Any platform use requires the specified compatible components.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / INDUSTRIAL EXTENSION

Heavy-duty rope & pulley extension ladders

Aluminium / industrial extension range



ILEX1200 / 12 m range photograph



UPPER DETAIL



LOWER DETAIL

ACCESSORIES & OPTIONS

Spiked feet; cable-roller pole support with safety chain; side rope; swivel feet; V-roller pole support with safety chain. See page 23.

175 kg

MAX. WORKING LOAD

Frame & rungs. Heavy-duty 6005A aluminium box-section stiles with wide, flat platform rungs for foot support. Integrated rung-to-stile joints reduce movement and wear.

Section guidance. Box-section stiles provide lateral rigidity. Interlocking rail channels guide the sections without external clamps; square rung profiles resist rotation.

Adjustment & locks. The rope-and-pulley system assists extension and lowering. Industrial retaining brackets and ladder locks hold the selected position. Engage the locks before climbing.

Selection. Industrial extension access in the lengths below. Specify the required pole support, feet and rope arrangement. Confirm the weight, transport dimensions and handling requirements of the complete assembly.

7 SIZES

9.0-20.5 m EXTENDED

ENQUIRE BY CODE

Product code	Closed height (m)	Extended length (m)
<u>Code to confirm</u>	4.85	9.0
<u>ILEX1020</u>	5.4	10.2
<u>ILEX1140</u>	6.0	11.4
<u>ILEX1200</u>	6.3	12.0
<u>ILEX1410</u>	7.5	14.1
<u>ILEX1650</u>	6.3	16.5
<u>ILEX2000</u>	7.5	20.5

Order by model and extended length. Product weights and accessory compatibility are available on request.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



FIBREGLASS / SINGLE-SIDED

Partial-fibreglass A-frame ladders

Fibreglass legs / aluminium steps



ILSPF006

ACCESSORIES & OPTIONS

Replacement caps, feet and fibre-ladder hinges; paint-tray fitment: enquire. Match parts to the model; see pages 24-25.

150 kg

MAX. WORKING LOAD

Materials. Fibreglass legs paired with aluminium steps, providing a mixed-material A-frame for commercial and light-industrial access.

Connections. Six-rivet connections secure the step assemblies to the rails. Double-riveted, anti-pinch hinges support the opening mechanism.

Cap & feet. Moulded stile cap with tool slots and paint-can provision, plus slip-resistant feet. The fibreglass rails resist weather and water exposure.

Selection. Single-sided format in the nominal heights below. The marketed step size includes the cap. For electrical applications, obtain model-specific suitability information; rail material alone does not establish suitability.

7 SIZES

4-16 STEP / 1.2-4.8 m NOMINAL

ENQUIRE BY CODE

Product code	Size	Height (m)
ILSPF004	4-step	1.2
ILSPF006	6-step	1.8
ILSPF008	8-step	2.4
ILSPF010	10-step	3.0
ILSPF012	12-step	3.6
ILSPF014	14-step	4.2
ILSPF016	16-step	4.8

Step size includes the top cap. Electrical suitability depends on the exact model, condition and work environment.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



FIBREGLASS / SINGLE-SIDED

Full-fibreglass single-sided ladders

Heavy duty / fibreglass legs and steps



ILSFF006

ACCESSORIES & OPTIONS

Red safety boards; steel hinge/riev options; replacement caps and feet. Paint-tray fitment: enquire. Confirm model compatibility.

175 kg

MAX. WORKING LOAD

Materials. Fibreglass legs and steps in a single-sided A-frame. Extra bracing at the top and bottom supports the frame for industrial access.

Connections. Six-rivet rail connections and double-riveted, anti-pinch hinges. Specify the required rivet and hinge material when discussing a particular application.

Cap & feet. Moulded top cap with tool slots and paint-can provision, with slip-resistant feet. Fibreglass components resist weather and water exposure.

Selection. Choose the nominal size and required fittings together. The cap is not a standing step. Request model-specific compliance and electrical-suitability documents for the intended work.

7 SIZES

4-16 STEP / 1.2-4.8 m NOMINAL

ENQUIRE BY CODE

Product code	Size	Height (m)
ILSFF004	4-step	1.2
ILSFF006	6-step	1.8
ILSFF008	8-step	2.4
ILSFF010	10-step	3.0
ILSFF012	12-step	3.6
ILSFF014	14-step	4.2
ILSFF016	16-step	4.8

Step size includes the top cap. Request model-specific compliance documentation for your application.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



FIBREGLASS / DOUBLE-SIDED

Full-fibreglass double-sided ladders

Heavy duty / steps on both sides



ILDFF006

ACCESSORIES & OPTIONS

Confirm the stabilising bar and steel/aluminium hinge and rivet options for the model. Replacement parts: pages 24-25.

175 kg

MAX. WORKING LOAD

Materials. Fibreglass legs and steps on both sides of the A-frame. Top and bottom bracing and connector brackets support the frame.

Connections. Six-rivet rail connections with double-riveted, anti-pinch hinges. Steel or aluminium rivet and hinge options depend on the selected specification.

Cap & feet. Moulded stile cap with tool slots and paint-can provision, plus slip-resistant feet. Fibreglass components resist weather and water exposure.

Selection. Double-sided access for industrial requirements. Confirm stabilising-bar requirements and fittings for the model. Follow its loading and setup instructions, and request application-specific documentation where electrical suitability matters.

7 SIZES

4-16 STEP / 1.2-4.8 m NOMINAL

ENQUIRE BY CODE

Product code	Size	Height (m)
ILDFF004	4-step	1.2
ILDFF006	6-step	1.8
ILDFF008	8-step	2.4
ILDFF010	10-step	3.0
ILDFF012	12-step	3.6
ILDFF014	14-step	4.2
ILDFF016	16-step	4.8

Confirm fittings and stabiliser requirements for the selected model. Follow the supplied user instructions.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



FIBREGLASS / ESKOM SPECIFICATION

Eskom-spec fibreglass extension ladders

Heavy duty / red fibreglass / spiked feet and cable roller



Range illustration / fittings vary

ACCESSORIES & OPTIONS

Standard: spiked feet and cable roller. Options: swivel feet, V-roller with safety chain, side rope and aluminium locks. See page 23.

136 kg

SAFE WORKING LOAD

175 kg

MAX. WORKING LOAD

Standard supply. Red fibreglass extension ladder with heavy-duty mild-steel spiked feet and cable roller. Rope-and-pulley operation assists adjustment.

Rungs & joints. Serrated, D-shaped aluminium rungs attach through aluminium side plates with four solid rivets. Polyethylene sleeves isolate the aluminium and fibreglass to reduce wear.

Guides & locks. Two sets of high-strength steel guides retain alignment. Spring-assisted, heavy-duty nylon gravity locks hold the selected rung position.

Alternative fittings. Free-swinging, self-aligning swivel shoes have slip-resistant tread. V-roller pole supports with safety chain, side-rope operation and aluminium locks are alternatives; confirm model compatibility.

9 SIZES

5.1-13.9 m EXTENDED

ENQUIRE BY CODE

Product code	Closed length (m)	Extended length (m)
ILES K510	3.0	5.1
ILES K630	3.6	6.3
ILES K750	4.2	7.5
ILES K870	4.8	8.7
ILES K960	5.4	9.6
ILES K1050	6.0	10.5
ILES K1110	6.3	11.1
ILES K1230	6.9	12.3
ILES K1390	7.8	13.9

Order by closed / extended length. Standard fittings: spiked feet and cable roller. Product weights available on request.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



ALUMINIUM / TELKOM TYPE

Telkom-type aluminium extension ladders

Medium duty / two-section utility access



Branded range illustration

ACCESSORIES & OPTIONS

Optional cable-roller or half-moon pole supports with safety chains; Telkom spiked feet. Confirm the combination. See page 23.

150 kg

MAX. WORKING LOAD

Construction. Telkom-type two-section extension ladder in corrosion-resistant 6005A aluminium, with square rungs and galvanized steel components.

Standard fittings. Pole rung and slip-resistant feet for the supplied configuration. Confirm pole-contact and restraint requirements for the intended task.

Section use. The sections can be separated for use as two single ladders where permitted. Maintain a two-rung overlap when used as an extension ladder.

Options. Cable-roller pole support with safety chain, or half-moon pole rung with safety chain and spiked feet. A fibreglass version is also offered. Confirm fittings and model documents for the complete assembly.

3 SIZES

6.0-9.0 m EXTENDED

ENQUIRE BY CODE

Product code	Closed (m)	Extended (m)	Weight (kg)
ILTELA600	3.4	6.0	11.8
ILTELA780	4.2	7.8	14.1
ILTELA900	4.85	9.0	16.05

Specify your utility configuration.

Include the ladder material, closed and extended length, pole-support fitting and foot type with your enquiry. See page 23 for the available fitting choices.

Confirm dimensions, weight and selected fittings for the supplied model when ordering.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



FIBREGLASS / TELKOM TYPE

Telkom-type fibreglass extension ladders

Medium duty / two-section push-up utility access



Branded range illustration

ACCESSORIES & OPTIONS

Optional cable-roller or half-moon pole supports with safety chains; Telkom spiked feet. Confirm the combination. See page 23.

150 kg

MAX. WORKING LOAD

Construction. Telkom-type fibreglass push-up extension ladder with square rungs and galvanized steel components for industrial access.

Standard fittings. Pole hangers with plastic hook plates and slip-resistant feet support the supplied arrangement.

Section use. The two sections may be separated for use as single ladders where permitted. Maintain a two-rung overlap in extension use.

Options & selection. Cable-roller pole support with safety chain, or half-moon pole rung with safety chain and spiked feet. Confirm configuration and electrical-suitability documents for the exact model; fibreglass rails alone do not establish suitability.

3 SIZES

6.0-9.0 m EXTENDED

ENQUIRE BY CODE

Product code	Closed (m)	Extended (m)	Weight (kg)
ILEFGX600	3.43	6.0	15.9
ILFEFG780	4.2	7.8	19.6
ILFEFG900	4.85	9.0	22.1

Specify your utility configuration.

Include the ladder material, closed and extended length, pole-support fitting and foot type with your enquiry. See page 23 for the available fitting choices.

Confirm dimensions, weight and selected fittings for the supplied model when ordering.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



MOBILE ACCESS / LADDER STAGE

Aluminium ladder stage

Mobile access platform / adjustable deck / lockable castors



Branded illustration / curved handles omitted

ACCESSORIES & FITTINGS

Confirm the guardrail set, platform deck, braces, locks and replacement castors for the selected configuration.

180 kg

LOAD CAPACITY

Construction. Mobile aluminium access platform with a framed plywood deck and diagonal bracing. The unit can be disassembled for transport.

Height adjustment. The platform adjusts from 0.95 m to 2.15 m. Platform height describes the deck position; it is separate from overall height and reach.

Mobility. 100 mm castors allow repositioning, with wheel locks for stationary use. Check access space against the base dimensions.

Configuration. Use the braces, locks and required guardrails specified in the supplied instructions. The photograph is a branded illustration with the curved handles omitted.

TECHNICAL SPECIFICATIONS

PRODUCT CODE ON REQUEST

Specification	Value
Load capacity	180 kg
Adjustable platform height	0.95-2.15 m
Total extended height	3.10 m
Base size (length x width)	2.15 x 0.80 m
Platform size (length x width)	1.78 x 0.40 m
Wheel diameter	100 mm
Self weight	51 kg
Indicative reach height	4.00 m

Dimensions refer to the complete reference assembly. Reach varies with the user; confirm the supplied configuration.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



UTILITY ACCESS / FITTINGS

Specify the complete ladder.

Pole supports, feet and adjustment options for the utility ranges.

Eskom range / standard supply

Red fibreglass, spiked feet and cable roller. Other fitting combinations must be specified with the ladder size.

01 Pole-contact fittings

Telkom options include cable-roller or half-moon pole supports with safety chains, and Telkom spiked feet. Cable-roller and V-roller pole supports with safety chains are options for compatible industrial extension models.

02 Footing choices

Spiked feet are standard on the Eskom range. Self-aligning swivel safety shoes with slip-resistant tread are an alternative configuration. Match the foot type and fixings to the ladder and supporting surface.

03 Ropes, guides & locks

Specify compatible rope-and-pulley or side-rope operation. The Eskom range uses spring-assisted nylon gravity locks; aluminium lock options depend on model compatibility.

04 Ordering information

Give the ladder range, material, closed length, extended length and required fitting combination. Include any utility specification or model-document requirements. Ask for weight and transport dimensions for the complete assembly.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



REPLACEMENT PARTS / CAPS & FEET

Keep your range working.

Replacement caps and feet.

Send the ladder code and a clear photo of the existing part to help identify the correct replacement.




Yellow cap

Medium-duty aluminium



Black cap

Black-cap aluminium

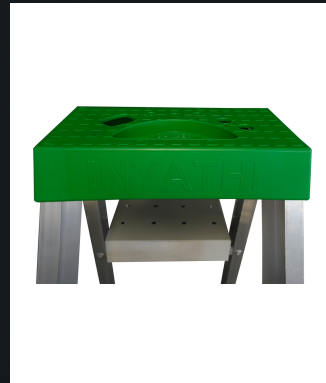

Green cap & tray

Heavy-duty A-frame



Red cap

Full-fibreglass



Yellow foot

A-frame replacement




Black foot

A-frame replacement



Green foot

A-frame replacement

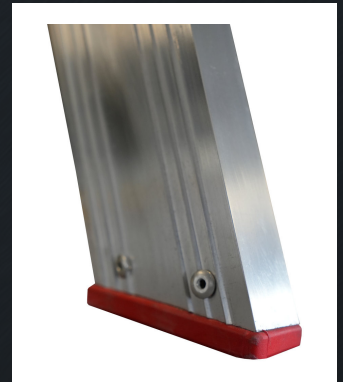

Red foot

A-frame replacement

Parts shown are range illustrations. Colour alone does not establish compatibility. Ask for availability and fitting advice.

Request a quote

Send model, quantity and delivery town.

067 774 3799 WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



REPLACEMENT PARTS / HARDWARE

The finishing details.

Replacement hinges, step components and supports.

Send the ladder code and a clear photo of the existing part to help identify the correct replacement.



A-frame hinge

Match side and fixing pattern



Fibre ladder hinge

Specify the ladder range



Step component

Quote step size and rail profile



Paint tray

Confirm cap and model fit



Pole rung

Confirm the extension model



Stabilising bar

Confirm rail spacing and fittings

Parts shown are range illustrations. Colour alone does not establish compatibility. Ask for availability and fitting advice.

Request a quote

Send model, quantity and delivery town.

067 774 3799 WHATSAPP

nikhail@inyathiladders.co.za


sales@inyathiladders.co.za



BUYING GUIDE / DIMENSIONS

Choose the size with care.


Product dimensions, working load and the intended task all matter.



NOMINAL HEIGHT

01 A-frame size

The marketed step size can include a top cap. Check the actual steps, permitted standing position and labelled nominal height.




CLOSED

EXTENDED

02 Closed and extended length


Closed length helps assess transport and storage. Extended length describes the assembled ladder. Neither is a standing or reach height.



EXAMPLE: 6 + 6 = 12

03 Rungs per section / total rungs

Combination tables separate the number of rungs per section from the total across all sections.



WIDTH

DEPTH

04 Handling and available space

Ask for product weight, folded width and open footprint when vehicle space, store aisles or handling requirements matter.

SCHEMATIC DIAGRAMS / NOT TO SCALE

Follow the supplied model instructions for load, setup and permitted configurations. For electrical work, request model-specific suitability information.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



RESELLERS / PROCUREMENT

Build your next order.

Start with the core sellers, then extend the range for your customers.

Core product	Ordering reference
5-step aluminium / 150 kg	ILMD005
6-step aluminium / 150 kg	ILMD006
8-step aluminium / 150 kg	ILMD008
10-step aluminium / 150 kg	ILMD010
6 m extension / 150 kg	ILEX600
Multipurpose / 150 kg	ILAM3.3

GAUTENG DELIVERY

2-3 days

NATIONAL DELIVERY

2-5 days

01 / Add range depth

Discuss heavy-duty A-frames, fibreglass, combination ladders and replacement parts to suit local demand.

02 / Confirm trade details

Request current prices, order quantities, delivery terms, lead times and applicable warranty details.

03 / Make reordering simple

Include model codes, sizes and accessory suffixes on your purchase order, plus the delivery branch and contact person.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



RETAIL MERCHANDISING / DISPLAY STAND

Put your range on display.

Inyathi ladder display stand / retail concept



Stand only

Branded stand with ladder dividers and a wheeled base.



Example ladder display

A selection of Inyathi ladders presented together in store.

01 BRAND PANEL

02 LADDER DIVIDERS

03 WHEELED BASE

Plan your store display.

Ask about availability, stand dimensions, ladder selection and supply terms.

Request a quote

Send model, quantity and delivery town.

067 774 3799

WHATSAPP

nikhail@inyathiladders.co.za

sales@inyathiladders.co.za



Build your next order.



SALES & TRADE ENQUIRIES

011 794 4456
010 222 0042

nikhail@inyathiladders.co.za
sales@inyathiladders.co.za

Units 3 & 4, Bition Mini Park
1474 Cranberry Street, Honeydew
Roodepoort, 2170, South Africa



WHATSAPP

067 774 3799

GAUTENG DELIVERY

2-3 days

NATIONAL DELIVERY

2-5 days

Manufactured to SABS SANS 50131

inyathiladders.co.za

[BACK TO CONTENTS >](#)